


ULTRA SILENCE



<http://www.watchwinder.com.tw/>




FANCY BRICK
BLDC MOTOR WATCH WINDER

Newly Upgraded to High Performance Brushless DC Motor (BLDC)

BOXY announced the 2nd Generation of BLDC Motor for watch winders in 2020. Many of customers appreciate this reliance, durability and silence BLDC Motors. We therefore upgraded the most popular Fancy Brick with BLDC Motor.

Features of Brushless DC Motor (BLDC)

Long Lifespan : No brushes, No carbon dust, no wear and tear.
Super Quiet : No gearbox noise. Never disturb you in a silent place.
More Efficient : Unique low RPM DC motor for watch winding.

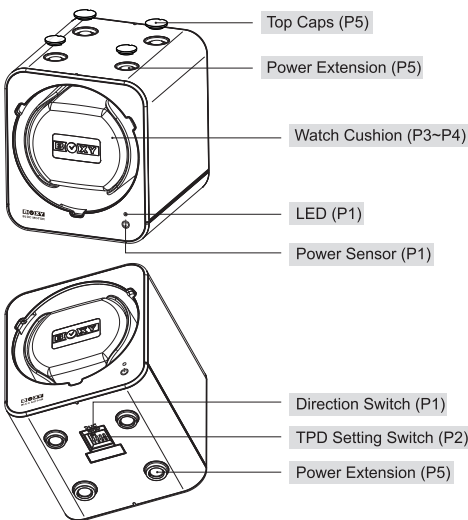


Power Sensor LED 01

A Touch Screen Power Sensor controls the power. To turn on this winder, touch the power symbol until the LED light on. Touch the power symbol again until the LED goes out to turn off the winder.




Direction Switch

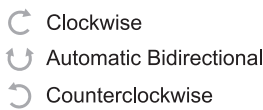

When bidirectional mode () is selected, the rotation direction of the first turn is random.

TPD (Turns per Day) Setting Switch 02

The 4 position Switch controls the watch winding sequences. Please see sequence chart below:

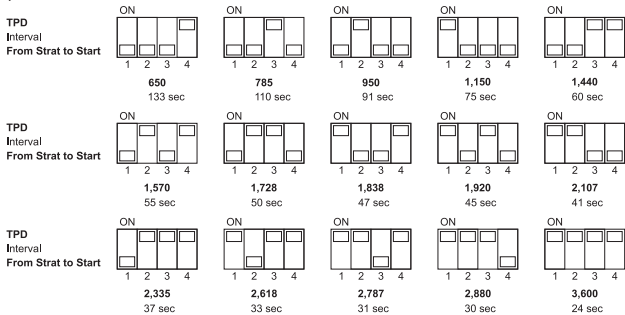


If you do not know what direction or how many TPD your watch requires, begin with the most popular setting—Clockwise at 1,150TPD

Note: All switches in the down position while the main power is ON will result in constant rotation. This setting could be harmful to your watches.
(TPD allows $\pm 3\%$ variance.)


Watch Cushion (1) 03

- Please wrap the watch band on the flat/straight side of the watch cushion, fasten the watch and **place them in the CENTER** of the watch cushion. Put the watch cushion back into the watch holder.
- Please securely fastening the watch band. An insecurely fastened watch band will affect normal operation.
- Make sure the power is off before removing the watch cushion.

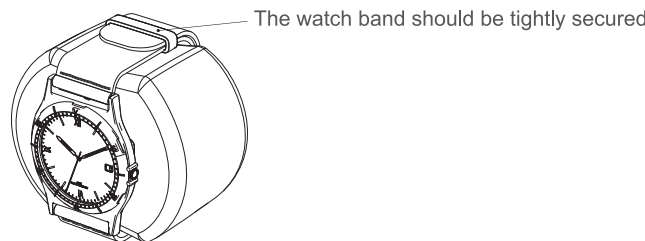

Watch Cushion (2) 04


There are 2 ways to use the watch cushion for different wrist sizes, kindly see below photos:

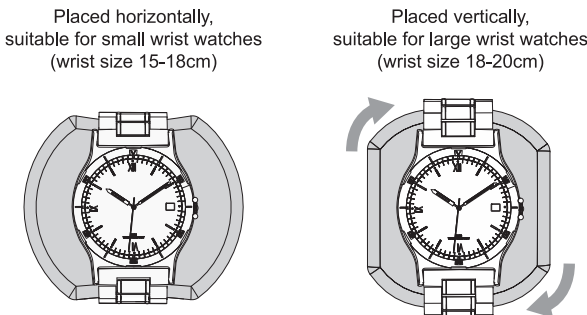

In addition to regular sized watch cushion, BOXY provides the lady's cushion that accommodate wrist size 13-16cm.


Power Extension 05

The most Unique feature of Fancy Brick watch winder is Power Sharing. Only 1 AC/DC Adaptor is required to drive up to 12 winders. We strongly recommend that you do not stack more than 3 winders together for stability and weight loading reasons.

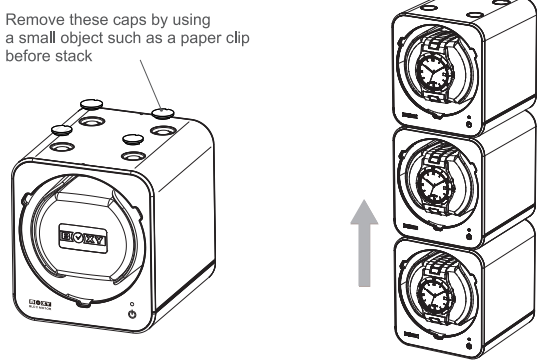

Accessories 06


You can purchase Accessories separately:
Note: Power Extended Station provides current connections horizontally.

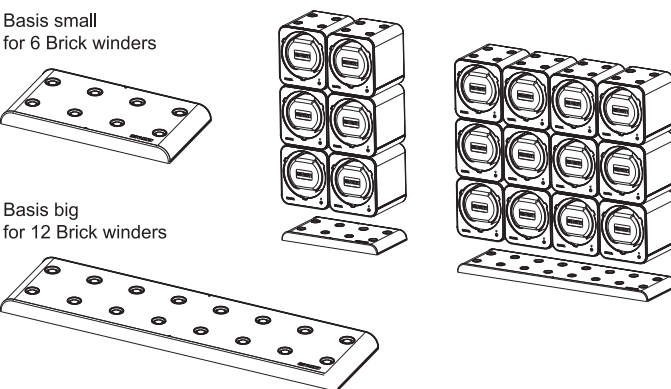

Replace a Belt 07

When the winder does not rotate according to the program and after gently spinning the watch holder by hand, it does not stop very shortly. It means the belt is loose or broken.

Please open the back panel (Pic.1) to check the belt. If the belt is just loose, reinsert it tightly. (Pic.2) If the belt is broken, you need to buy and replace it.

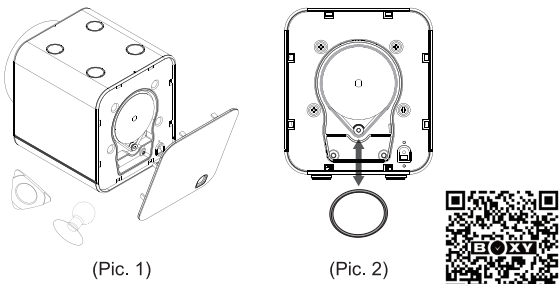

Scan the QR code for the Video of replacing belt:
<https://www.youtube.com/user/abestwatchwinder>

Important Safety Instructions 08

- Please peruse and follow the important safety instructions before using this product.
- Please unplug the power cable during long periods of storage or during thunderstorms.
- To protect the power plug and the cable, do not put them in a place that may cause people to trip and fall.
- Please do not let the power cable contact heat sources, and loosely coil it for storage.
- Please use a piece of slightly-damp, soft cloth to wipe the case; do not use any detergent to wipe the case.
- This product works with an output voltage **5V**. This product contains a USB cable or a Type-C cable.
- Do not disassemble the device. It could be damaged and the warranty would be void.
- This watch winder is suitable for the watch weight less than 300 grams.

Product Warranty 09

BOXY provides LIFE repairing service to every of winders. BOXY BLDC Fancy carries 36 months warranty for product / 60 months for motor from the date of purchase. Any damaged parts or production errors which occur during the warranty period will be repaired free of charge. Belt is the consuming part which is not cover under warranty. Please purchase it when needed.

When the warranty expires, the winders may also enjoy repair service with a product repairs fee and additional shipping fee.

The warranty does not include product appearance damage, inappropriate usage, and damages caused by human error or unauthorized disassembly.

In the event of product issues, please call or email us.
Phone : 886-4-883-7312
e-mail : abestcom@abest-tw.com

Serial Number : _____
Purchase Date : _____
Dealer : _____